

KARIBA 6E technical data sheet Standard code 375406





Sommario

DESCRIPTION	3
FEATURES	3
TECHNICAL NOTES	3
DIMENSIONS	3
STANDARD SUPPLY	5
ON DEMAND	5
PACKAGING	5
ACCESSORIES AND SPARE PARTS	6
LIST	7



Kariba 6E

Concealed cistern for floorstanding wc, max. capacity 6lt

DESCRIPTION

Concealed cistern for floor-standing or squat WC (with dedicated extension). Ideal for integration with state-of-the-art sanitary ware that is also certified for reduced flushing.

FEATURES

Features and plus



For floor-standing Wc (or squat wc with dedicated extension)



6lt in-wall cistern (adjustable to 4.5lt)



Dual flush with adjustable partial flush (from 2.5 to 3.5lt)



Maintenance operations in 3 minutes



Assembly operations in 8 minutes



FLEXVALVE



Monoblock container



Lago system



NORMA-PLUS float valve, acoustic cl.1, LGA-TUV (standard for code 375406)




100% Made in Italy

TECHNICAL NOTES

- 6lt high density PE monoblock container with a nominal thickness of 85mm and without joints
- Repairable in case of accidental drilling
- Plaster holder fixing mesh (according to code)
- Extruded closed-cell PE insulation, anti-condensate and soundproofing with thermal resistance
- FlexValve: discharge valve with silicon gasket. Made of polypropylene with silicone additive (PTE)
- NORMA-PLUS float valve, acoustic class 1, LGA-TUV approved adjustable between 6 and 4.5lt (standard for code 375406)
- Maintenance operations without using tools
- Pneumatisable without the need to replace internal components



DIMENSIONS

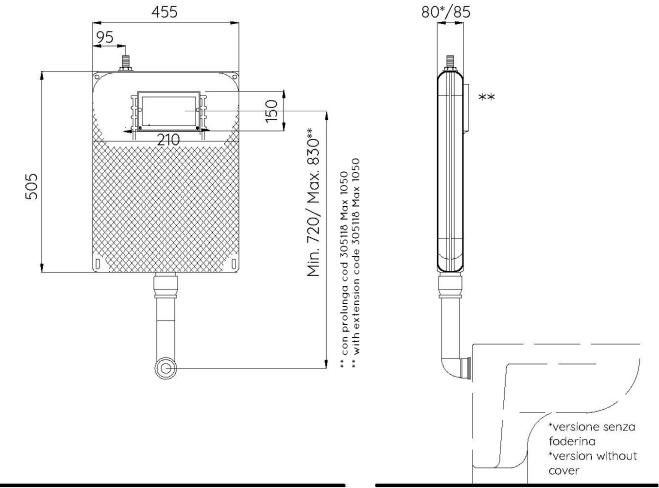

^{**} Min. 0.5 mm di muro ** Min. 0.5 mm of wall



STANDARD SUPPLY

- Dismountable stop valve 3/8"-3/8" including fitting 1/2"-3/8"
- Adjustable discharge pipe up to 100 mm with polystyrene cover and conical gasket
- Protection template to shape perimeter of tiles or plaster
- Construction site protection cap for discharge pipe

IT NEEDS TO BE INTEGRATED WITH DUAL COUNTERPLATE COD. 317010

S

ON DEMAND


- Dual counter-plate
- Dual flush plate Fidia/Itaka/Aurea
- Wall mounting kit
- Pipe with rosette
- Squat WC extension
- Pneu system

PACKAGING


CODE	PCS	LxDxH	KG
375406	1	565x110x715 mm	3,6



ACCESSORIES AND SPARE PARTS

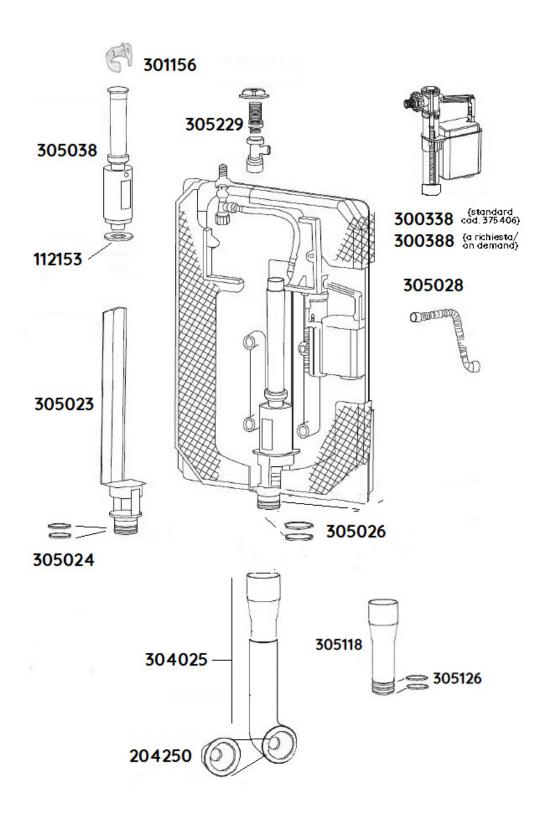



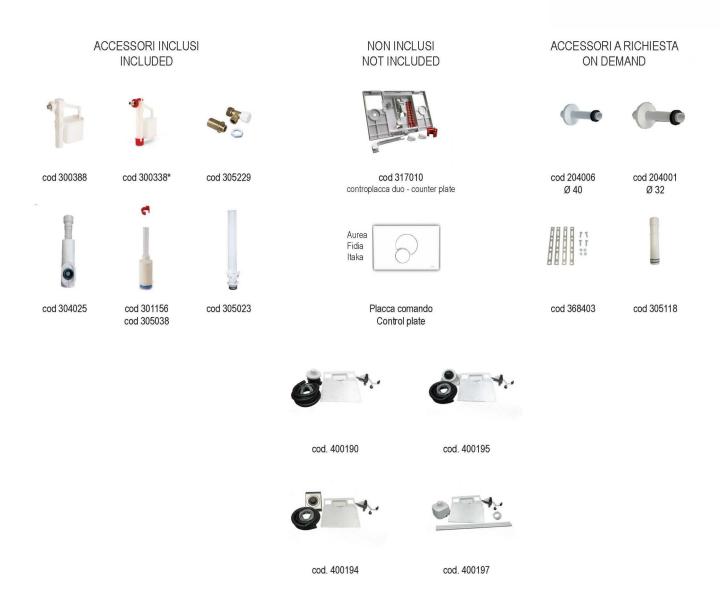

LIST

Kariba 6E	
CODE	DESCRIPTION
305229	Dismountable brass stop valve 3/8"-3/8" including fitting 1/2"-3/8"
305028	Flexible hose with gasket L. 280 mm 3/8" - 3/8"
300388	Norma float valve 3/8" for concealed cisterns (on demand according to the code)
300338*	NORMA-PLUS float valve 3/8" for concealed cisterns, acoustic cl.1, (standard for code 375406)
305023	6E removable drain with lip gaskets
305024	Lip gaskets for 6E drain
305038	6E discharge valve
301156	Red anchor



Kariba 6E		
112153	Silicon gasket for discharge valve ø 60/21 mm	
304025	Insulated discharge pipe set, complete with conic gasket	
204250	Universal conic gasket ø 60x32/40 mm	
305126	O-ring gasket for discharge pipe coupling	
305118	Straight extension pipe ø 50 mm with o-ring for discharge pipe (on request for squat toilets)	
305026	O-ring gasket for discharge pipe coupling	
204001	WC connection pipe with rosette and clamp gasket ø 32 mm	
204006	WC connection pipe with rosette and clamp gasket ø 40 mm	
368403	Fixing brackets (on demand)	
400190	Pneu transforming kit with aluminium inspection plate and remote white hand-button	
400194	Pneu transforming kit with aluminium inspection plate and remote inox leg-button	
400195	Pneu transforming kit with aluminium inspection plate and remote white plastic leg-button for floor/wall	
400197	Pneu transforming kit with aluminium inspection plate and remote white hand-button	